



PRO Series

Piston  
compressor  
range



Air. Anytime. Anywhere




# PRO Series

## Direct drive and Belt drive piston compressors

ABAC PRO single stage and two stage piston compressors combine high user comfort with great durability and efficient performance. All the units are equipped with the ABAC belt guard, providing an optimal air flow over the pump. The pumps run at low speed and come with aftercoolers to reduce operating temperatures more than ever before.

### Applications

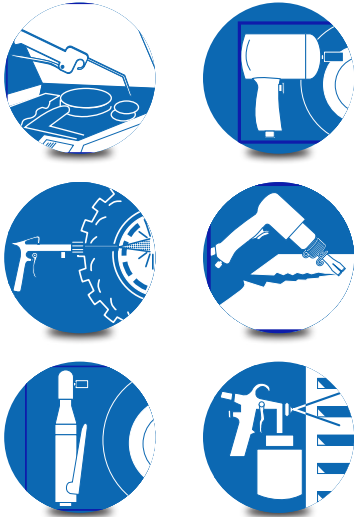

### Efficiency

Highly innovative belt guard improving the cooling air flow over the pump

### Durability

Standard aftercooler on the new highly durable and slower running pump.



**User comfort**  
With maximum feet, extra rubber handles and lockable pivot wheels

Direct Drive	Part Number	Tank	Pump	l/min	CFM	HP	kW	rpm	Volt	Bar	L x W x H (mm)	Kg
START O20P	1121020090	6L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	375 x 310 x 530	11
POLE POSITION O20P	1121210968	24L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	660 x 300 x 650	22
MONTECARLO O20P	1121360802	50L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	770 x 410 x 730	30
POLE POSITION L30P	1129100173	24L	Lubricated	310	11	3	2.2	2850	230/1/50	10	660 x 300 x 605	29
MONTECARLO L30P	1129100199	50L	Lubricated	310	11	3	2.2	2850	230/1/50	10	940 x 320 x 700	37

Belt Drive	Part Number	Tank	Air Displacement		Free Air Delivered		Noise dB(A)	Motor			Volt	Bar	L x W x H (mm)	Kg
			l/min	CFM	l/min	CFM		HP	kW	rpm				
PRO A29B 50 CM2	4116024556	50L	255	8.9	175	6.2	73	2	1.5	1075	230/1/50	10	870 x 370 x 780	49
PRO A29B 90 CM2	4116024553	90L	255	8.9	175	6.2	73	2	1.5	1075	230/1/50	10	1010 x 415 x 900	56
PRO A29B 50 CM3	4116024949	50L	317	11.2	224	7.9	73	3	2.2	1050	230/1/50	10	847 x 395 x 796	45
PRO A29B 90 CM3	4116024950	90L	317	11.2	224	7.9	73	3	2.2	1050	230/1/50	10	968 x 474 x 870	52
PRO A39B 90 CM3*	4116025017	90L	393	13.8	280	10.1	73	3	2.2	1050	230/1/50	10	1180 x 460 x 930	72
PRO A39B 90 FT3	4116024530	90L	393	13.8	280	10.1	73	3	2.2	1050	400/3/50	10	1180 x 460 x 930	72
PRO A39B 150 FM3*	4116025015	150L	393	13.8	280	10.1	73	3	2.2	1050	230/1/50	10	1375 x 420 x 950	87
PRO A39B 150 FT3	4116024539	150L	393	13.8	280	10.1	73	3	2.2	1050	400/3/50	10	1375 x 420 x 950	87
PRO A39B 200 FM3*	4116025016	200L	393	13.8	280	10.1	73	3	2.2	1050	230/1/50	10	1500 x 470 x 1110	91
PRO A39B 200 CM3*	4116025022	200L	393	13.8	280	10.1	73	3	2.2	1050	230/1/50	10	1500 x 470 x 1110	91
PRO A39B 200 FT3	4116024541	200L	393	13.8	280	10.1	73	3	2.2	1050	400/3/50	10	1500 x 470 x 1110	91
PRO A39 270 FM3 Tandem**	4116024868	270L	786	27.6	560	20.2	73	6	4.4	1050	230/1/50	10	1570 x 470 x 1030	153
PRO B4900 200 FT4	4116019614	200L	514	18	393	13.8	78	4	3	1400	400/3/50	11	1500 x 450 x 960	137
PRO B5900B 200 FT5.5	4116019759	200L	653	22.9	500	17.7	78	5.5	4	1400	400/3/50	11	1580 x 580 x 1150	161
PRO B6000 270 FT7.5	4116020193	270L	827	28.9	650	23	78	7.5	5.5	1400	400/3/50	11	1520 x 600 x 1250	177
PRO B7000 270 FT10 YD	4116020794	270L	1210	42.4	960	33.9	78	10	7.5	1300	400/3/50 YD	11	1520 x 600 x 1250	196

\*16 amp supply \*\*A39 Tandem Unit requires 32Amp, 230/1/50 supply. Model Description :- C = Receiver on Wheels, F = Receiver is Floor Mounted



Air. Anytime. Anywhere.

Your Authorised Distributor